



HBB45Y Series of Swivels are designed with American advanced technologies for gasoline self-service applications for customers' convenience, and they are installed between hose and nozzle to reduce strain and avoid unnecessary wear and tear, and provide flexibility and fueling hose lasts longer.

**Technical Specifications:**



Max flow rate: 60 L/min for 3/4" and 120 L/min for 1"  
 Body: Zinc (Surface electrophoresis treatment)  
 Outlet adaptor: Brass  
 Inlet adaptor: Zinc  
 Seal: Buna-N or Viton for option

**Packing:**

3/4" Swivel: 32cm x 25cm x 22cm  
 50 Pcs/Carton  
 20.5 Kg/Carton  
 1" Swivel: 37cm x 26cm x 26cm  
 50 Pcs/Carton  
 25.4 Kg/Carton

**Ordering Specifications:**

Item No.	size
HBB45Y-1	NPT3/4" F x NPT3/4" M
HBB45Y-2	BSP3/4" F x BSP3/4" M
HBB45Y-3	NPT1" F x NPT1" M
HBB45Y-4	BSP1" F x BSP1" M

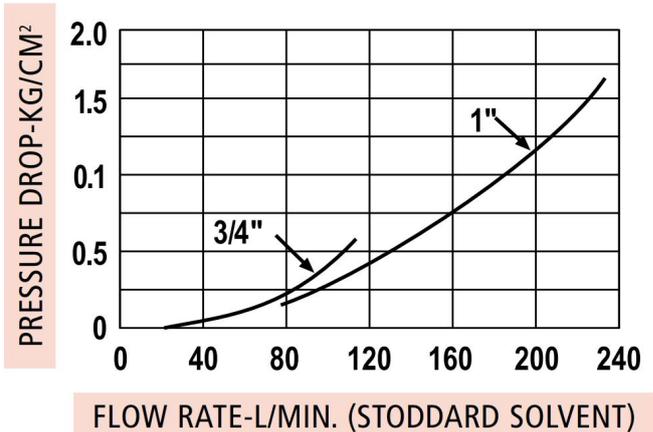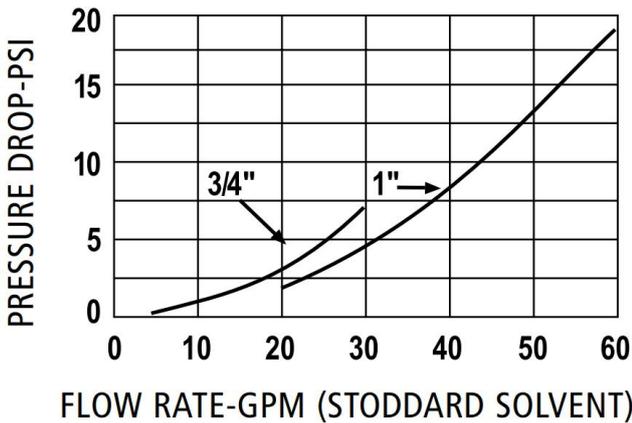

**Features:**

Suitable for use in gasoline,diesel, and up to 10% ethanol blends.  
 Compact, attractive profile for a sleek, modern appearance.  
 Better flow performance less restriction means higher refueling speeds.  
 Unique 2 planes of rotation for easy nozzle positioning and hose life.  
 50 psi (3.45 bar) maximum pressure.