


4 Inch Surface-Oxidized Aluminum T-Type Pneumatic Tank Truck Bottom Valve for Safe Liquid Transfer

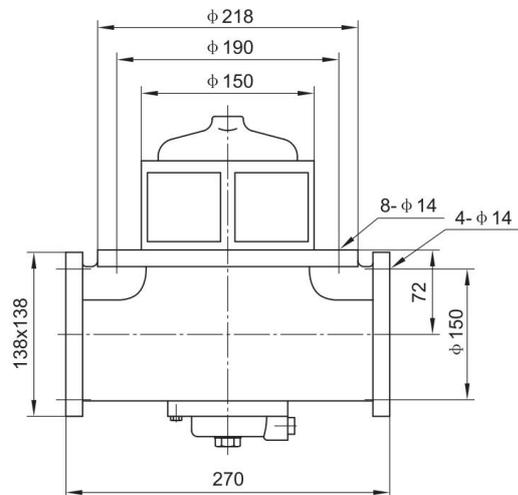

Technical Specifications:

Item No. HB804TQ-100R
 Nominal size: 4 inch
 Working pressure: 0.6MPa
 Maximum flow rate: 2500L/min
 Opening mode: pneumatic
 Temperature range: $-20 \sim +70$ °C
 Flange: Round on Tank Side
 Square on Pipe Side

The following accessories are designed to work in conjunction with the bottom valve for options:

HBBVTSFL-100R – Tank Side Flange with 8 bolt holes
 HBBVTSFL-100RB – Tank Side Welding Sump with 8 male bolts
 HBBVTSFL-100RA – Tank Side Welding Sump with 8 female nuts
 HBBVPSFL-100F – Pipe Side Square Flange with 4 bolt holes
 Buna-N / Viton Round Gasket for 4 inch Bottom Valve Tank Side
 Buna-N / Viton Square Gasket for 4 inch Bottom Valve Pipe Side

Features

Compliant with EN 13308 – Service equipment for tanks.
 Pneumatic control – Ensures reliable operation for loading and unloading processes.
 Optimized internal design – Minimizes leakage during loading and allows high flow capacity.
 Durable construction – Made of anodized aluminum for corrosion resistance.
 VITON or Buna-N sealing gaskets for option – Excellent chemical resistance and durability.
 1/8" GAS air inlet – Standard connection for pneumatic control.