


Compact 3-Inch Manual Tank Bottom Valve for Fuel and Chemical Transport Vehicles – HB804BS-80 Series

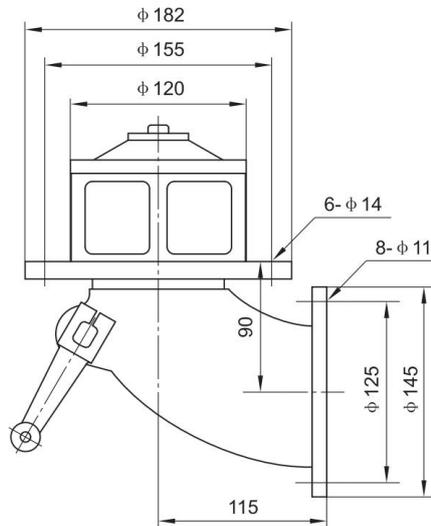

Technical Specifications:

Item No. HB804BS-80

Nominal size: 3 inch

Working pressure: 0.6MPa

Maximum flow rate: 750L/min

Opening mode: Manual

Temperature range: -20~+70 °C

Flange: Round on Tank Side

Round on Pipe Side

The following accessories are designed to work in conjunction with the bottom valve for options:

HBBVTSFL-80R – 3" Tank Side Flange with 6 bolt holes

HBBVTSFL-80RB – 3" Tank Side Welding Sump with 6 male bolts

HBBVTSFL-80RA – 3" Tank Side Welding Sump with 6 female nuts

HBBVPSFL-80R – 3" Pipe Side Round Flange

Buna-N/Viton Round Gasket for 3 inch Bottom Valve Tank Side

Buna-N/Viton Round Gasket for 3 inch Bottom Valve Pipe Side

Features

Compliant with EN 13308 – Service equipment for tanks.

Mechanical control – Ensures reliable operation for loading and unloading processes.

Optimized internal design – Minimizes leakage during loading and allows high flow capacity.

Durable construction – Made of anodized aluminum for corrosion resistance.

VITON or Buna-N sealing gaskets for option – Excellent chemical resistance and durability.