


Compact 4-Inch Manual Tank Bottom Valve (HB804AS-100) – For Fuel and Hazardous Liquid Tank Trucks

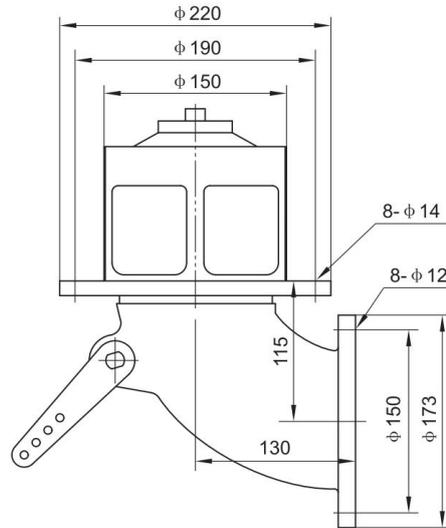

Technical Specifications:

Item No. HB804AS-100

Nominal size: 4 inch

Working pressure: 0.6MPa

Maximum flow rate: 2500L/min

Opening mode: Manual

Temperature range: -20~+70 °C

Flange: Round on Tank Side
Round on Pipe Side

The following accessories are designed to work in conjunction with the bottom valve for options:

HBBVTSFL-100R – 4" Tank Side Flange with 8 bolt holes

HBBVTSFL-100RB – 4" Tank Side Welding Sump with 8 male bolts

HBBVTSFL-100RA – 4" Tank Side Welding Sump with 8 female nuts

HBBVPSFL-100R – 4" Pipe Side Round Flange

Buna-N/Viton Round Gasket for 4 inch Bottom Valve Tank Side

Buna-N/Viton Round Gasket for 4 inch Bottom Valve Pipe Side

Features

Compliant with EN 13308 – Service equipment for tanks.

Mechanical control – Ensures reliable operation for loading and unloading processes.

Optimized internal design – Minimizes leakage during loading and allows high flow capacity.

Durable construction – Made of anodized aluminum for corrosion resistance.

VITON or Buna-N sealing gaskets for option – Excellent chemical resistance and durability.